

Green-i Easy Fit Controls



LIGHTING CONTROLS

HVAC CONTROLS

CONNECTION PRODUCTS



A wide range of UK designed quality products

Our Green-i easy fit range of controls has been developed to save you energy on your lighting, heating and ventilation.

The range is made up of presence detectors, connection systems, switches and timers – allowing you to easily take control of your energy usage by providing simple and effective control solutions.

CP Electronics, a brand of Legrand, is a leading name in the design and manufacture of commercial, public sector and domestic lighting control solutions.



FM 45789

EMS 534520

OHS 642036



Ceiling Mounted PIRs

Pages 4-15



Timers

Pages 40-53




Lighting Test Switch

Pages 54-55



Wall Mounted PIRs

Pages 16-23

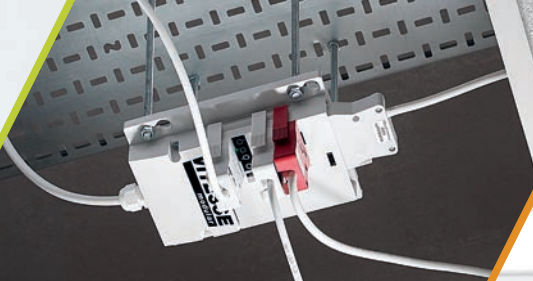

Connection Products

Pages 24-37

VITESSE
modular



HVAC Controls

Pages 38-39



Light Level Controls

Pages 56-57



Technology Guide & Glossary

Pages 58-62



www.green-i.co.uk

Ceiling Mounted PIR Presence Detectors

Available as flush, surface or batten mounted, these easy to install movement sensors are designed to reduce the amount of time lighting is left on unnecessarily.

Our sensors automatically turn lights on when an area is occupied, and off when an area is vacated. Where lux level sensing is included, lighting will be kept off if there is sufficient natural light, resulting in further savings.

Catalogue Icon Key

Suitable for the control of:



Lighting



Heating



Ventilation

How PIR sensors work



PIR movement sensors work by detecting the movement of body heat. Ideal for spaces where a defined detection pattern is required.



Flush Mounted PIR Presence Detector

GEFL



A simple to install PIR sensor for small projects working to a budget.

Features

- Presence detection and lux level sensing – auto on, auto off
- Works with any type of lamp
- Adjust time delay and lux settings via pots
- Integral power supply
- Suitable for lighting, heating or ventilation
- 5 year warranty

Order Code

Description

GEFL

Basic switching, low profile, IP40, ceiling, flush mounted, PIR, presence detector


Load Rating at 230VAC

R	I	F	CFL	LED	Time Delay
8A	8A	4A	3A	3A	10s-30m

R = Resistive I = Incandescent F = Fluorescent CFL = Compact Fluorescent Lamp

Detection Pattern

high < sensitivity > low

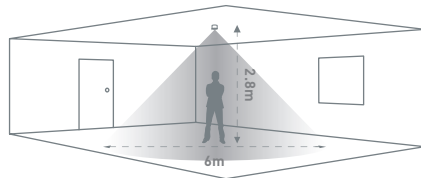

Simple Installation



Attach pluggable connector to sensor.



Sensor is held firmly in place by spring clips.



Set up using pot adjustments.

Push Button Flush Mounted PIR Presence Detector

GEFL-PB



A value packed PIR sensor ideal for post-installation set up – especially in medium spaces and when time is critical.

Features

- Presence detection and lux level sensing – auto on, auto off
- Works with any type of lamp
- Adjust time delay and lux settings via push buttons
- Lockable settings
- Integral power supply
- Suitable for lighting, heating or ventilation
- 5 year warranty

Simple Installation



Attach pluggable connector to sensor.



Sensor is held firmly in place by spring clips.




Set up using simple push buttons.

Order Code	Description
GEFL-PB	Basic switching, low profile, push button, IP40, ceiling, flush mounted, PIR, presence detector

Load Rating at 230VAC					Time Delay
R	I	F	CFL	LED	
8A	8A	4A	3A	3A	10s–30m
R = Resistive I = Incandescent F = Fluorescent CFL = Compact Fluorescent Lamp					

Detection Pattern

high < sensitivity > low

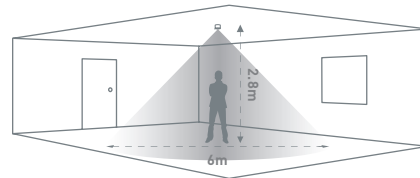

Infrared Programmable Flush Mounted PIR Presence Detector

GEFL-IR



GEFL-HS



This PIR sensor can be programmed post installation with a handy, user-friendly infrared handset, making set up fast and tool free.

GEFL-IR Features

- Presence detection and lux level sensing – auto on, auto off
- Works with any type of lamp
- Adjust time delay and lux settings via infrared handset*
- Integral power supply
- Suitable for lighting, heating or ventilation
- 5 year warranty

GEFL-HS Features

- Easy to use handset
- Allows in situ programming of GEFL-IR
- Battery operated
- 5 year warranty

Simple Installation



Attach pluggable connector to sensor.



Sensor is held firmly in place by spring clips.



Adjust with GEFL-HS.


Order Code	Description
GEFL-IR	Basic switching, infrared programmable, IP40, ceiling, flush mounted, PIR, presence detector
GEFL-HS	Green-i, compact, infrared, user handset (for use with GEFL-IR & GENB-IR)

Load Rating at 230VAC					Time Delay
R	I	F	CFL	LED	
8A	8A	4A	3A	3A	10s-30m

R = Resistive I = Incandescent F = Fluorescent CFL = Compact Fluorescent Lamp

Detection Pattern

high < sensitivity > low

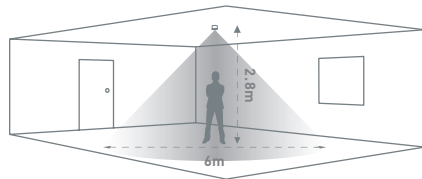

*Sold separately

Push Button Flush Mounted PIR Presence / Absence Detector

GEFL-PB-ABS



With the advantages of push buttons already built in, this PIR sensor also has absence mode for increased flexibility.

Features

- Presence detection and lux level sensing – auto on, auto off
- Works in presence or absence mode (see technology guide for more information)
- Works with any type of lamp
- Adjust time delay and lux settings via push buttons
- Lockable settings
- Integral power supply
- Suitable for lighting, heating or ventilation
- 5 year warranty

Simple Installation



Attach pluggable connector to sensor.



Sensor is held firmly in place by spring clips.



Set up using simple push buttons.


Order Code	Description
GEFL-PB-ABS	Basic switching, low profile, push button, IP40, ceiling, flush mounted, PIR, presence/absence detector

Load Rating at 230VAC					Time Delay
R	I	F	CFL	LED	
8A	8A	4A	3A	3A	10s-30m

R = Resistive I = Incandescent F = Fluorescent CFL = Compact Fluorescent Lamp

Detection Pattern

high < sensitivity > low

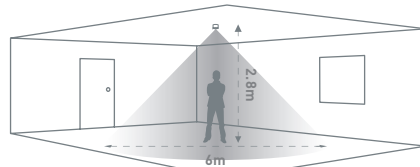

Surface Mounted Push Button PIR Presence Detector

GESM



**With its easy push button set up,
coupled with a two part surface
mount body, this PIR sensor is
ideal for first fix installation.**

Features

- Presence detection and lux level sensing – auto on, auto off
- Works with any type of lamp
- Adjust time delay and lux settings via push buttons
- Lockable settings
- IP54 rated
- Integral power supply
- Suitable for lighting, heating or ventilation
- 5 year warranty

Simple Installation



Mount the backplate on the ceiling, feed through cables.



Connect wires and clip on sensor.



Set up using simple push buttons.


Order Code	Description
GESM	Basic switching, push button, IP54, ceiling, surface mounted, PIR, presence detector

Load Rating at 230VAC					Time Delay
R	I	F	CFL	LED	
10A	10A	6A	3A	3A	10s–30m

R = Resistive I = Incandescent F = Fluorescent CFL = Compact Fluorescent Lamp

Detection Pattern

high < sensitivity > low

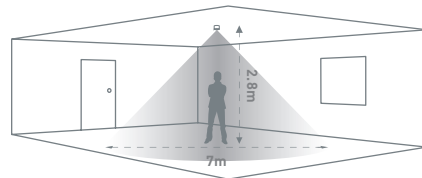

Adjustable Head Long-Range Presence Detector

GENB-IR



NEW



Up to 24m range



Program via IR handset



SUITS
LED



GEFL-HS



15°



60°



90°



Adjust head to create required detection pattern.

This PIR presence detector uses an adjustable PIR 'curtain style' lens designed for long-range detection of movement.

GENB-IR Features

- Presence detection with lux level sensing – auto on, auto off
- Works with any type of lamp
- Adjust time delay and lux settings via infrared handset*
- Adjustable narrow long-range detection pattern – ideal for corridor applications
- Integral power supply
- Suitable for lighting, heating or ventilation
- 5 year warranty

GEFL-HS Features

- Easy to use handset
- Allows in situ programming of GENB-IR
- Battery operated
- 5 year warranty

Simple Installation



Attach pluggable connector to sensor.



Sensor is held firmly in place by spring clips.



Adjust with GEFL-HS.


Order Code	Description
GENB-IR	Basic switching, narrow beam, adjustable head, long-range, IP40, ceiling, flush mounted, PIR, presence detector
GEFL-HS	Green-i, compact, infrared, user handset (for use with GEFL-IR & GENB-IR)

Load Rating at 230VAC					Time Delay
R	I	F	CFL	LED	
8A	8A	4A	3A	3A	10s-30m

R = Resistive I = Incandescent F = Fluorescent CFL = Compact Fluorescent Lamp

Detection Pattern

high < sensitivity > low

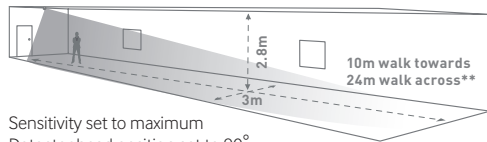

Sensitivity set to maximum
Detector head position set to 90°

*Sold separately **Please see page 62 for explanation of walk towards and walk across.

Ceiling Mounted PIR Presence Detector

SPIR-F/C



The SPIR-F/C is a surface mounted movement sensor that can be easily mounted onto a single gang standard back box.

Features

- Presence detection and lux level sensing – auto on, auto off
- Works with any type of lamp
- Adjust time delay and lux settings via pots
- IP55 rated version available (SPIR-F/C/IP)
- Integral power supply
- Suitable for lighting, heating or ventilation
- 5 year warranty


Order Code	Description
SPIR-F/C	Basic switching, ceiling, back box mounted, PIR, presence detector
SPIR-F/C/IP	Basic switching, IP55, ceiling, back box mounted, PIR, presence detector

Load Rating at 230VAC					Time Delay
R	I	F	CFL	LED	
16A	10A	6A	3A	3A	10s-30m

R = Resistive I = Incandescent F = Fluorescent CFL = Compact Fluorescent Lamp

Detection Pattern

high < sensitivity > low

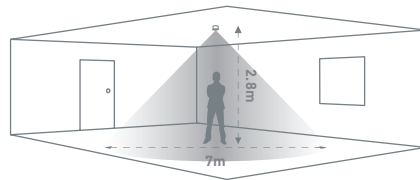

Miniature Batten Mounted PIR Presence Detector

GIMB



A durable retrofit PIR sensor perfect for outdoor use and wash-down areas. Suitable for mounting onto a wide range of luminaires, it comes complete with a fitting kit.

Features

- Presence detection – auto on, auto off
- Range up to 16m at 7m mounting height
- IP65 rated
- Integral power supply
- Pre-wired (1m cable length)
- Suitable for any luminaire with 20mm cable entry
- Suitable for lighting
- 5 year warranty

Application



GIMB uses 20mm cable entry of a batten luminaire.


Order Code	Description
GIMB	Basic switching, miniature, retrofit, IP65, ceiling, luminaire mounted, PIR, presence detector

Load Rating at 230VAC					Time Delay
R	I	F	CFL	LED	
–	2A	2A	2A	2A	10m

R = Resistive I = Incandescent F = Fluorescent CFL = Compact Fluorescent Lamp

Detection Pattern

high < sensitivity > low

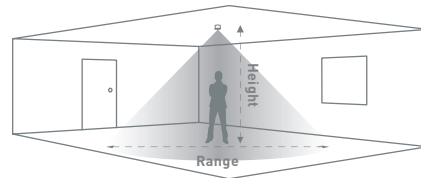


Height	Range
2.8m	9m
7m	16m

Wall Mounted PIR Presence Detectors

Our cost-effective wall mounted sensors fit standard back-boxes, making them simple to fit and set up.

Just like their ceiling mounted counterparts, they react to daylight, keeping lighting off if there's sufficient natural light. Absence sensing is also available on some models.

How PIR sensors work

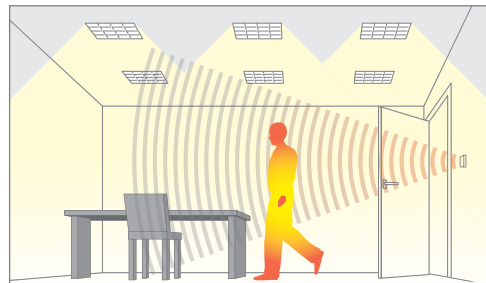

PIR movement sensors work by detecting the movement of body heat. Ideal for spaces where a defined detection pattern is required.

Catalogue Icon Key

Suitable for the control of:



Lighting



Heating



Ventilation



Wall Mounted PIR Presence Detector with Override

GIPDC



With only a two wire set up, this wall PIR sensor is a like-for-like replacement for conventional wall switches.

Features

- Presence detection and lux level sensing – auto on, auto off
- Adjust time delay and lux settings via pots
- Works in presence or absence mode (see technology guide for more information)
- Works with any type of lamp
- Suitable for lighting, heating or ventilation
- 5 year warranty

Interchangeable cover plates




Order Code	Description
GIPDC	Basic switching, no neutral, switch, wall, back box mounted, PIR, presence detector

Load Rating at 230VAC					Time Delay
R	I	F	CFL	LED	
–	10A	10A	10A	10A	1m–30m

R = Resistive I = Incandescent F = Fluorescent CFL = Compact Fluorescent Lamp

Detection Pattern

high < sensitivity > low

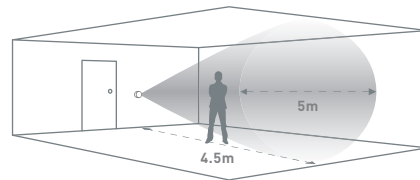

Order Code	Description
GIFP-ST	Silver effect cover plate
GIFP-BZ	Bronze effect cover plate

Wall Mounted PIR Presence Detector with Override

PDS/OV



A low cost, wall fit PIR which has a host of features – like-for-like fitting, manual on, auto off option, and lux level sensing to work with natural daylight.

This sensor does not require a neutral connection so it can quickly replace an existing light switch.

Please note: Not suitable for use with LED lamps.

Features

- Presence detection and lux level sensing – auto on, auto off
- Adjust time delay and lux settings via pots
- Suitable for lighting
- 5 year warranty


Order Code	Description
PDS/OV	Basic switching, no neutral, overridable, wall, back box mounted, PIR, presence detector
PDS-ABS/OV	Basic switching, no neutral, overridable, wall, back box mounted, PIR, presence/absence detector

Load Rating at 230VAC					Time Delay
R	I	F	CFL	LED	
–	10A	6A	3A	–	5m–1h

R = Resistive I = Incandescent F = Fluorescent CFL = Compact Fluorescent Lamp

Detection Pattern

high < sensitivity > low

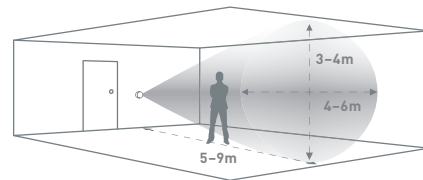

Concealed Fixings Wall Mounted PIR Presence Detector

PDS-PRM



This modern wall PIR detector is a direct replacement for a standard 2 wire switch. Its slim fascia has concealed fixings.

This sensor does not require a neutral connection so it can quickly replace an existing light switch.

Features

- Presence detection and lux level sensing – auto on, auto off
- Works with any type of lamp
- Adjust time delay and lux settings via pots
- Suitable for lighting, heating or ventilation
- 5 year warranty


Order Code	Description
PDS-PRM	Basic switching, no neutral, concealed fixings, wall, back box mounted, PIR, presence detector
PDS-PRM/S	Basic switching, no neutral, visible fixings, wall, back box mounted, PIR, presence detector

Load Rating at 230VAC					Time Delay
R	I	F	CFL	LED	
10A	10A	10A	10A	10A	1m–30m

R = Resistive I = Incandescent F = Fluorescent CFL = Compact Fluorescent Lamp

Detection Pattern

high < sensitivity > low

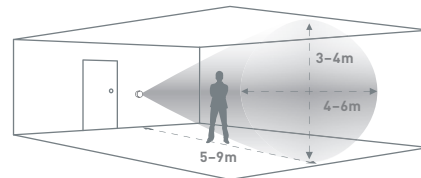

Wall Mounted PIR Presence Detector

PDS



An established, cost effective movement sensor, for direct replacement of standard switches.

This sensor does not require a neutral connection so it can quickly replace an existing light switch.

Please note: Not suitable for use with LED lamps.

Features

- Presence detection and lux level sensing – auto on, auto off
- Adjust time delay and lux settings via pots
- Suitable for lighting
- 5 year warranty


Order Code	Description
PDS	Basic switching, no neutral, wall, back box mounted, PIR, presence detector

Load Rating at 230VAC					Time Delay
R	I	F	CFL	LED	
–	10A	6A	3A	–	5m–1h

R = Resistive I = Incandescent F = Fluorescent CFL = Compact Fluorescent Lamp

Detection Pattern

high < sensitivity > low

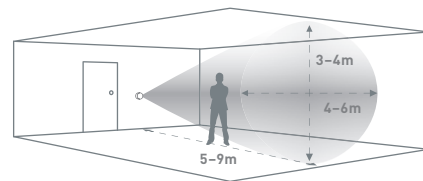

Concealed Fixings Wall Mounted PIR Presence Detector

SPIR-PRM



A modern PIR wall mounted sensor with neutral connection for increased loads and safety.

It fits a single gang standard switch box or a shallow back box when using the supplied extender.

Features

- Presence detection and lux level sensing – auto on, auto off
- Works with any type of lamp
- Adjust time delay and lux settings via pots
- Suitable for lighting, heating or ventilation
- 5 year warranty

Order Code

Description

SPIR-PRM

Basic switching, concealed fixings, wall, back box mounted, PIR, presence detector


Load Rating at 230VAC

R	I	F	CFL	LED	Time Delay
16A	10A	6A	3A	3A	10s–1h

R = Resistive I = Incandescent F = Fluorescent CFL = Compact Fluorescent Lamp

Detection Pattern

high < sensitivity > low

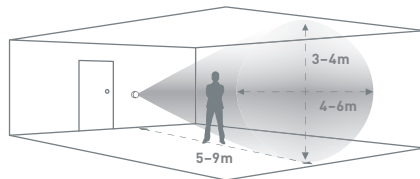

Wall Mounted PIR Presence Detector

SPiR




This wall mounted PIR sensor is available in three versions, basic switching, basic switching with lux level sensing and basic switching with volt free contacts.

Features

- Works with any type of lamp
- Adjust time delay via pots (SPiR-LSF version also adjusts lux settings via pots)
- Suitable for lighting, heating or ventilation
- 5 year warranty

Detection Pattern

high < sensitivity > low

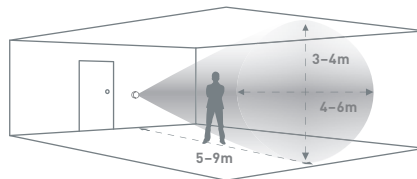

Order Code	Description
SPiR-F	Basic switching, wall, back box mounted, PIR, presence detector
SPiR-LSF	Basic switching, lux level sensing, wall, back box mounted, PIR, presence detector

Load Rating at 230VAC					Time Delay
R	I	F	CFL	LED	
16A	10A	6A	3A	3A	10s-1h

R = Resistive I = Incandescent F = Fluorescent CFL = Compact Fluorescent Lamp

Order Code	Description
SPiR-FVf	Basic switching, voltage free option suitable for BMS applications, wall, back box mounted, PIR, presence detector

Load Rating at 230VAC					Time Delay
R	I	F	CFL	LED	
10A	10A	6A	3A	3A	10s-1h


R = Resistive I = Incandescent F = Fluorescent CFL = Compact Fluorescent Lamp

Vitesse Modular™ Lighting Connection System

Packed with innovative features, Vitesse Modular is a simple, pluggable, cost effective method of providing power and control for lighting installations.

The system easily slots together and can be expanded up to 16 ways, making it adaptable to a wide variety of room layouts.

Once installed, modules can be added or removed to accommodate new layouts and uses.

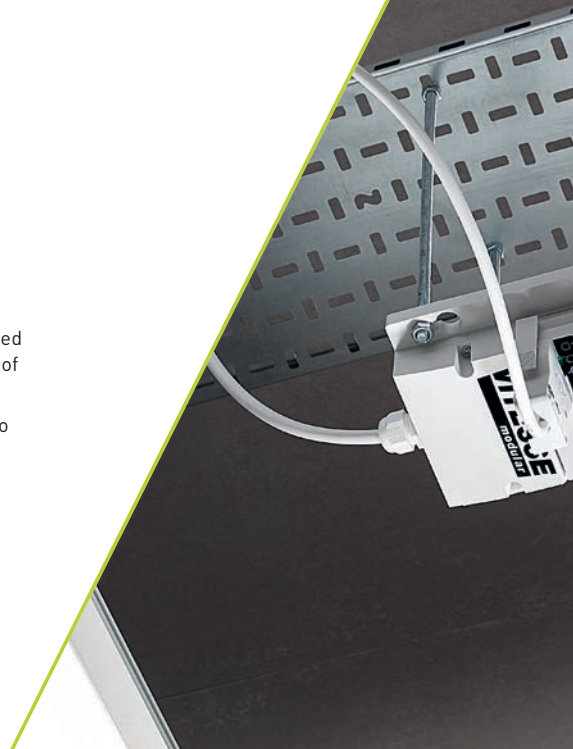



SELECT



CONNECT



DETECT

Ideal for
industrial,
commercial and
retail buildings.

Vitesse Modular™ grows and adapts to suit the installation

2-way



4-way



6-way



8-way



10-way



12-way



14-way



16-way



Sample Configuration

Products Used



VITM4-S2
Starter Module



Luminaire
Leads




Detector
Leads



VITM4
Detector

2-way Starter Module

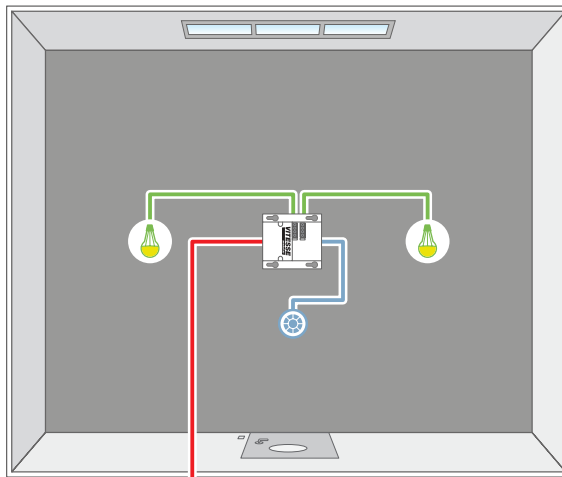

Presence Detector



Luminaire Leads



Detector Leads



Mains Supply

Sample Configuration

Products Used



VITM4 Starter Module



VITM4 Extender Module



Luminaire Leads




Detector Leads



VITM4 Detector

4-way Starter Module + Extender Module

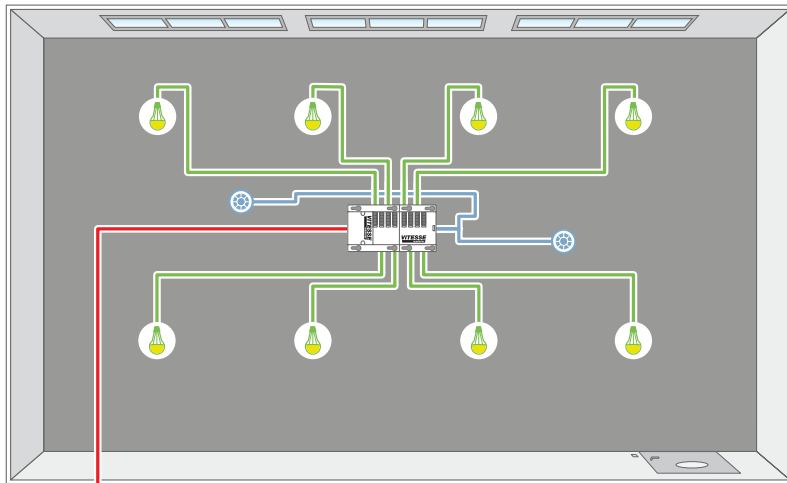

Presence Detector

Luminaire Leads

Dual Detector Leads

Mains Supply

Sample Configuration

Products Used



VITM4 Starter Module



VITM4 Extender Module




Switching Module



Luminaire Leads

4-way Starter Module + Extender Module + Switching Module

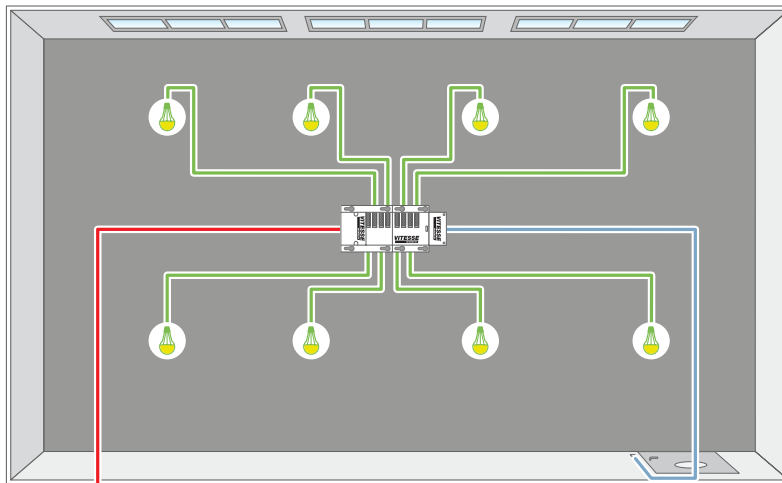

— Luminaire Leads — Switching Supply — Mains Supply

Sample Configuration

4-way Starter Module + 3x Extender Module + Switching Module

Suggested Products



VITM4 Starter Module




VITM4 Extender Module



Switching Module



Luminaire Leads

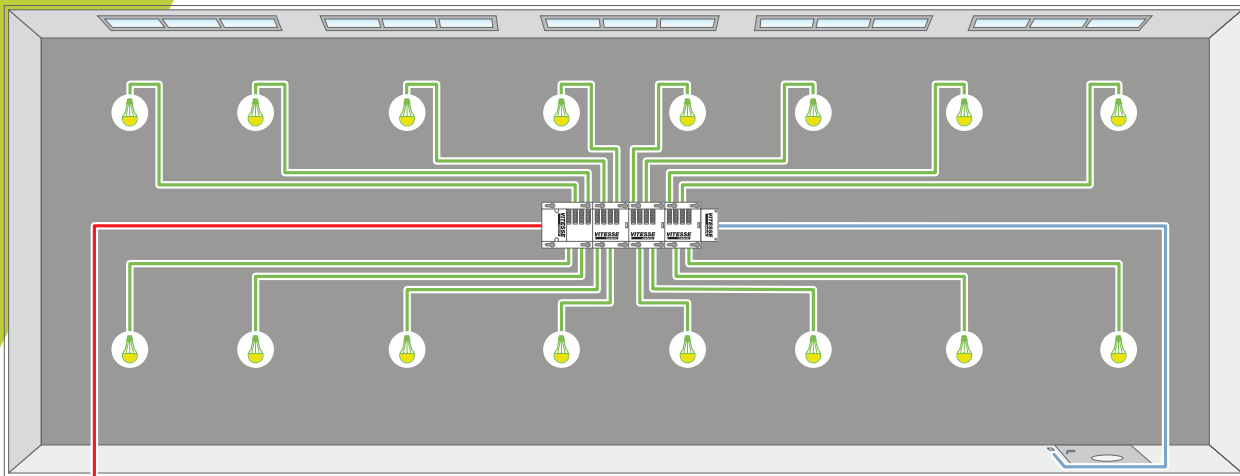

— Luminaire Leads — Switching Supply — Mains Supply

2-way Starter Module

VITM4-S2



This 2-way starter module offers a low cost entry point when only two outputs are required.

The addition of extender modules provides the ability to configure 6, 10 and 14 way combinations.

Features

- This two-way starter module provides power and control for lighting installations.
- Once it's installed, modules can be easily added or removed depending on future requirements and layouts.
- Suitable for lighting
- 5 year warranty


Configuration options

See Page 26



Order Code	Description
VITM4-S2	Starter module, switching, 4 pole, 2 outputs

Dimensions (mm)



Compatible with selected presence detectors

See Page 36



4-way Starter Module

VITM4-S




The VITM4-S can be used as a standalone unit providing 4 outputs or can be extended to 8, 12 or 16 outputs.

Features

- This four-way starter module provides power and control for lighting installations.
- Once it's installed, modules can be easily added or removed depending on future requirements and layouts.
- Suitable for lighting
- 5 year warranty

Configuration options

See Page 26

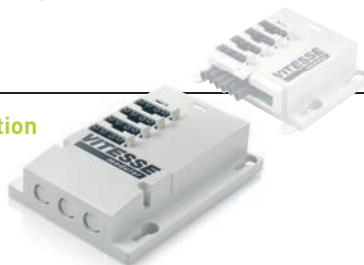


Order Code

Description

VITM4-S

Starter module, switching, 4 pole, 4 outputs

Dimensions (mm)



Compatible with selected presence detectors

See Page 36



Pre-wired Switching Package

VITM4-SL1



The pre-wired switching package provides a simple ready-to-go solution for the connection of up to 4 luminaires.

Features

- The package includes a 4-way starter module, a ceiling rose, 4 pole connector plug and 1 metre of cable.
- Can be extended to, 8, 12 or 16 outputs using the Extender Module
- Suitable for lighting
- 5 year warranty

Order Code	Description
VITM4-SL1	Pre-wired, starter module package, switching, 4 pole, 4 outputs, 4 pole ceiling rose and connector, 1m lead

Extender Module

VITM4-E



The extender module is used to increase the number of outputs for the 2-way or 4-way starter modules.

Features

- A total of three extender modules can be easily added to either starter module to create an up to 16-way lighting connection system. Vitesse Modular can be reconfigured at any time should requirements change.
- Suitable for lighting
- 5 year warranty

Configuration options

See Page 26




Order Code

Description

VITM4-E

Extender module, switching, 4 pole, 4 outputs

Dimensions (mm)



Switching Module

VITM4-SELVMOD



The switching module can be added to any combination of starter and extender modules.

SELV (safety extra low voltage) module removes the need for mains voltage switch wires and RCD to comply with IEE 17th Edition regulations.

Features

- ✓ Allows switches in parallel for two way, and mimics intermediate switching
- ✓ Built in time delay function.
- ✓ See pages 27 & 28 for application diagrams
- ✓ Suitable for lighting
- ✓ 5 year warranty

Configuration options

See Page 26




Order Code

Description

VITM4-SELVMOD

SELV module, switching

Dimensions (mm)



Flush Mounted PIR Presence Detectors

VITM4-EBDSPIR-B



The VITM4-EBDSPIR adds presence detection functionality to Vitesse Modular when required.

The detector can be mounted either flush into a ceiling tile or using a surface mounting box. The low profile design means the unit can be mounted in a narrow ceiling void. No external control boxes are required as the unit is self contained.

Features

- Presence detection and lux level sensing – auto on, auto off
- Adjust time delay and lux settings via pots
- Integral power supply
- Pre-wired (3m cable length)
- Suitable for lighting
- 5 year warranty


Order Code	Description
VITM4-EBDSPIR-B	Basic switching, compact, IP40, ceiling, flush mounted, PIR, presence detector, c/w 3m lead
VITMR-EBDSPIR-B	Basic switching, compact, IP40, ceiling, flush mounted, PIR, presence detector, c/w 3m lead, plug and ceiling rose connector

Load Rating at 230VAC					Time Delay
R	I	F	CFL	LED	
8A	8A	6A	3A	3A	10s-30m

R = Resistive I = Incandescent F = Fluorescent CFL = Compact Fluorescent Lamp

Detection Pattern

high < sensitivity > low

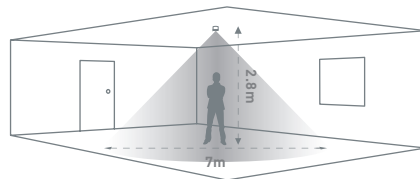


Leads & Connectors


VITM4

Quality assured, pre-wired detector and luminaire leads reduce installation times and ensure reliability. Individual connectors and ceiling rose kit provide additional flexibility.


DETECTOR LEADS

	Order Code	Description
	VITM4-L3-B	4 pole, 3m, 1mm ² , single detector lead, for basic switching, single channel
	VITM4-L5-B	4 pole, 5m, 1mm ² , single detector lead, for basic switching, single channel
	VITM4-LD3-B	4 pole, 3m, 1mm ² , dual detector lead, for basic switching, single channel


LUMINAIRE LEAD CONNECTORS

	Order Code	Description
	VITM4-LPW	4 pole, male connector, white plug
	VITM4-LPR	4 pole, male connector, red plug

LUMINAIRE LEADS

	Order Code	Description
	VITM4L303100W	4 pole, 3 core, 3m, 1mm ² , LSF, luminaire lead, white plug
	VITM4L305100W	4 pole, 3 core, 5m, 1mm ² , LSF, luminaire lead, white plug
	VITM4L403100R	4 pole, 4 core, 3m, 1mm ² , LSF, luminaire lead, red plug
	VITM4L405100R	4 pole, 4 core, 5m, 1mm ² , LSF, luminaire lead, red plug

CEILING ROSES

	Order Code	Description
	VITM-ROSE	4 pole, female ceiling rose, c/w white male connector plug


Surface mounted controller for air conditioning

GESM-AC



AWARD
WINNING
PRODUCT

How it works

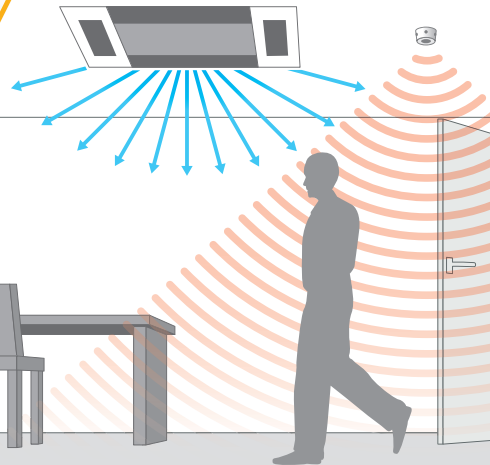

The GESM-AC detects presence and regulates air conditioning use based on room occupancy. As a result, significant energy savings can be made.

This AC controller simply ‘learns’ an AC unit’s infrared code, then controls its operation based on occupancy. As it is surface mounted and battery powered, installation is simplified and disruption is reduced.

Features

- Compatible with most infrared controlled AC units
- Battery operated
- Presence detection - auto on, auto off
- Adjust time delay settings via push buttons
- Lockable settings
- Sleep mode extends battery life
- 5 year warranty

Easy to set up



Press ☀ once to engage learn mode (on).



Point the air conditioning remote at the GESM-AC and press on.



Press ☀ twice to engage learn mode (off).




Point the air conditioning remote at the GESM-AC and press off. The controller is then set.

Order Code	Description
GESM-AC	Surface mount AC controller

Detection Pattern

high < sensitivity > low

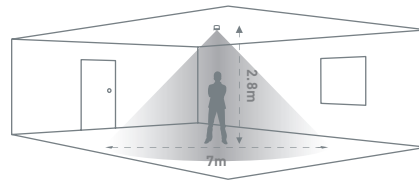

Timers

Two and three wire (neutral) versions of our products are available. Three wire switches can manage different loads with increased electrical safety.





Push Button Timer

ELLIPSE



The ELLIPSE is cost effective and easy to install, combining push button operation with electronic reliability.

Features

- Suitable for lighting
- Adjust time delay settings via rear adjustment pots
- 5 year warranty

Order Code	Description
ELLIPSE	No neutral push button timer
ELLIPSE-TN	No neutral push button timer complete with neon

Load Rating at 230VAC					Time Delay
R	I	F	CFL	LED	
–	10A	10A	10A	–	20s–20m

R = Resistive I = Incandescent F = Fluorescent CFL = Compact Fluorescent Lamp

Neon Version



Push Button Timer

GITLC




This low profile no-neutral timer can control a range of loads up to 10 Amps. It has an LED light ring to aid location in low light conditions.

Features

- Suitable for lighting, heating or ventilation
- Adjust time delay settings via pots
- Stylish green LED ring
- 5 year warranty

Interchangeable
cover plates



Order Code	Description
GITLC	No neutral low profile push button timer

Load Rating at 230VAC					Time Delay
R	I	F	CFL	LED	
–	10A	10A	10A	10A	1m–30m, 15m–2h

R = Resistive I = Incandescent F = Fluorescent CFL = Compact Fluorescent Lamp

Order Code	Description
GIFP-ST	Silver effect cover plate
GIFP-BZ	Bronze effect cover plate



Push Button Timer

MRT16-PB



This simple to use push button timer can be used for a wide range of applications, and has an easy to set adjustable timing period.

Pushing the button activates the circuit and starts the timing period (this is easily adjustable and is set at installation to any time between 1 second and 2 hours).

Features

- Suitable for lighting, heating or ventilation
- Works with any type of lamp
- Adjust time delay settings via pots
- 5 year warranty

Neon Version



Order Code	Description
MRT16-PB	Push button timer
MRT16-PB/TN	Push button timer with temporary neon
SLV1	Slave push button
SLV1N	Slave push button with neon

Load Rating at 230VAC					Time Delay
R	I	F	CFL	LED	
16A	10A	6A	3A	3A	1s-2h

R = Resistive I = Incandescent F = Fluorescent CFL = Compact Fluorescent Lamp


Order Code	Description
MRT16-PB/VF	Push button timer c/w voltage free contact

Load Rating at 230VAC					Time Delay
R	I	F	CFL	LED	
10A	10A	6A	3A	3A	1s-2h

R = Resistive I = Incandescent F = Fluorescent CFL = Compact Fluorescent Lamp

Push Button Timer

MRT-PRM

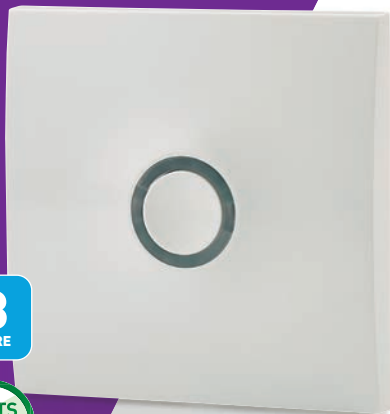

A stylish, low profile timer with simple push button operation, tamper resistant plate and LED locator light – ideal for use in communal spaces.

Pushing the button activates the circuit and starts the timing period (this is easily adjustable and is set at installation to any time between 1 second and 2 hours).

Features

- Suitable for lighting, heating or ventilation
- Works with any type of lamp
- Adjust time delay settings via pots
- Stylish red LED ring
- 5 year warranty

Order Code	Description
MRT-PRM	Push button timer with temporary LED

Load Rating at 230VAC					Time Delay
R	I	F	CFL	LED	
16A	10A	6A	3A	3A	1s-2h

R = Resistive I = Incandescent F = Fluorescent CFL = Compact Fluorescent Lamp

Touch Activated Timer

KH2



A robust timer with tamper resistant touch pad operation. It is easy to operate and has a fully adjustable timing period.

The neon indicator on the KH2N allows it to be easily located in low light conditions.

Please note: Not suitable for use with LED lamps.

Features

- Adjust time delay settings via pots
- Suitable for lighting
- 5 year warranty

Neon Version



Order Code	Description
KH2	No neutral touch activated timer
KH2N	No neutral touch activated timer complete with neon

Load Rating at 230VAC					Time Delay
R	I	F	CFL	LED	
–	10A	10A	10A	–	10s–20m

R = Resistive I = Incandescent F = Fluorescent CFL = Compact Fluorescent Lamp

Touch Activated Timer

MRT16-TA



This robust timer is suitable to safely operate a wide range of loads, due to its 3-wire specification.

The timer is also available in temporary neon, permanent neon and voltage free contact versions.

Features

- Suitable for lighting, heating or ventilation
- Works with any type of lamp
- Adjust time delay settings via pots
- 5 year warranty

Neon Version



Order Code	Description
MRT16-TA	Touch activated timer
MRT16-TA/TN	Touch activated timer with temporary neon
MRT16-TA/PN	Touch activated timer with permanent neon

Load Rating at 230VAC					Time Delay
R	I	F	CFL	LED	
16A	10A	6A	3A	3A	1s-2h

R = Resistive I = Incandescent F = Fluorescent CFL = Compact Fluorescent Lamp

Order Code	Description
MRT16-TA/VF	Touch activated timer c/w voltage free contact

Load Rating at 230VAC					Time Delay
R	I	F	CFL	LED	
10A	10A	6A	3A	3A	1s-2h

R = Resistive I = Incandescent F = Fluorescent CFL = Compact Fluorescent Lamp

Weather Proof Touch Activated Timer

KH3



The KH3 is housed in a tough surface mount IP66 weatherproof housing – ideal for heavy use and wash down areas.

It is a robust timer with easy to use, tamper resistant touch pad operation. It has a fully adjustable timing period.

The neon indicator on the KH3N allows it to be easily located in low light conditions.

Please note: Not suitable for use with LED lamps.

Features

- Suitable for lighting
- Adjust time delay settings via pots
- IP66 rated
- 5 year warranty

Order Code	Description
KH3	Touch activated timer with IP66 rating
KH3N	Touch activated timer with IP66 rating complete with neon

Load Rating at 230VAC					Time Delay
R	I	F	CFL	LED	
–	10A	10A	10A	–	10s–20m

R = Resistive I = Incandescent F = Fluorescent CFL = Compact Fluorescent Lamp

Neon Version



Weather Proof Touch Activated Timer

MRT16-WP



This IP66 timer is also tough and weatherproof, with the added ability to safely operate a wide range of loads due to its 3-wire specification.

The adjustable time on period is started by pressing the tamper resistant touch pad on the front of the switch. The MRT16-WP is also available in temporary and permanent neon versions.

Features

- ✓ Suitable for lighting, heating or ventilation
- ✓ Works with any type of lamp
- ✓ Adjust time delay settings via pots
- ✓ IP66 rated
- ✓ 5 year warranty

Order Code	Description
MRT16-WP	Touch activated timer with IP66 rating
MRT16-WP/TN	Touch activated timer with IP66 rating and temporary neon
MRT16-WP/PN	Touch activated timer with IP66 rating and permanent neon

Load Rating at 230VAC					Time Delay
R	I	F	CFL	LED	
16A	10A	6A	3A	3A	1s-2h

R = Resistive I = Incandescent F = Fluorescent CFL = Compact Fluorescent Lamp

Neon Version



Remote Activated Timer

MRT16-REM



A simple but capable timer with tamper resistant faceplate. It has neutral connection making it suitable for a range of loads. It can also operate remotely so is ideal for communal areas.

Features

- Suitable for lighting, heating or ventilation
- Works with any type of lamp
- Adjust time delay settings via pots
- 5 year warranty

Order Code	Description
MRT16-REM	Remote activated timer
MRT16-REM/VF	Remote activated timer c/w voltage free contact

Load Rating at 230VAC					Time Delay
R	I	F	CFL	LED	
16A	10A	6A	3A	3A	1s-2h

R = Resistive I = Incandescent F = Fluorescent CFL = Compact Fluorescent Lamp

Remote Activated Timer

MRT-REM-PRM



This timer has the same load versatility as the MRT16-REM, and the benefit of remote operation. Its low profile housing has concealed, tamper-resistant fixings.

Features

- Suitable for lighting, heating or ventilation
- Works with any type of lamp
- Adjust time delay settings via pots
- 5 year warranty



Order Code	Description
MRT-REM-PRM	Low profile remote activated timer

Load Rating at 230VAC					Time Delay
R	I	F	CFL	LED	
16A	10A	6A	3A	3A	1s-2h

R = Resistive I = Incandescent F = Fluorescent CFL = Compact Fluorescent Lamp

High Output Run Back Timer

RBT1



This timer’s high 20 Amps output makes it ideal for immersion heater control. Appliances can be powered for a set time and adjusted further by the user.

A simple display shows the user how much time is left to run. An ON / OFF switch allows the user to cancel the timing program whilst a memory remembers the last timing sequence selected.

Features

- Adjust time delay settings via push button
- Suitable for lighting, heating or ventilation
- 5 year warranty

Order Code	Description
RBT1	High output run back timer

Load Rating at 230VAC					Time Delay
R	I	F	CFL	LED	
20A	6A	6A	3A	No LED	15m–2h (adjustable in 15m increments)

R = Resistive I = Incandescent F = Fluorescent CFL = Compact Fluorescent Lamp

Adjustable Boost Timer

RBT2



With simple one-button operation, this electronic boost timer provides effective control for a range of loads.

The unit allows an appliance to be powered for a set time period which can be adjusted by the user. A simple LED display indicates how much time is left to run, and its 'Night Light' feature illuminates all the LEDs when the unit is not in use to allow ease of location in the dark.

Pressing and releasing the switch whilst the unit is in operation allows the user to cancel the timing. A memory function remembers the last timing selected.

Features

- Adjust time delay settings via push button
- Suitable for lighting, heating or ventilation
- 5 year warranty

Order Code	Description
RBT2	Plate mounted adjustable boost timer

Load Rating at 230VAC					Time Delay
R	I	F	CFL	LED	
16A	10A	6A	3A	6A	15min-30min, 1hr or 2 hrs

R = Resistive I = Incandescent F = Fluorescent CFL = Compact Fluorescent Lamp



Emergency Lighting Test Switch

Automatic key operated emergency lighting test switch, permanently wired to the emergency luminaire supply.

A key switch is used to interrupt the supply to the luminaires for a pre-programmed period of time. At the end of the time period the supply to the luminaires is automatically re-instated. The result is that there is no risk of depleting the batteries in the emergency fitting.

How it works



Supply on



Ten minute test



One hour test



Three hour test

Automatic Emergency Lighting Test Switch

ELT10



The ELT10 emergency lighting test switch is designed to test the function of emergency luminaires.

Features

- Suitable for lighting
- Key operated switch for secure access
- Three pre-set test periods
- 5 year warranty

Order Code	Description
ELT10	Automatic emergency lighting test switch, single channel

Load Rating at 230VAC					Time Delay
R	I	F	CFL	LED	
–	–	6A	3A	6A	10m–3h adjustable

R = Resistive I = Incandescent F = Fluorescent CFL = Compact Fluorescent Lamp




Light Level Controls


Ideal for applications such as external security lights or display lighting at night.

This will switch on external lighting when light levels drop below a pre-set level. Lighting can then be switched off after a preset time or when the background light is adequate again.

Sufficient daylight, lights off



Insufficient daylight, lights on



The photocell within the sensor ensures that lights will not be switched on until ambient lux levels drop below a preset value, and will be switched off at a preset time or once the desired lux level is reached.

Surface Mounted Photocell Switch

ALC15



The ALC15 twilight switch will turn lighting on when the ambient light falls below a preset level.

Features

- Suitable for lighting
- Works with any type of lamp
- Adjust time delay and lux settings via pots
- IP66 rated
- 5 year warranty

Order Code	Description
ALC15	Robust, IP66, surface mounted, wall, photocell switch, basic switching

Load Rating at 230VAC					Time Delay
R	I	F	CFL	LED	
10A	8A	6A	3A	6A	0-16h

R = Resistive I = Incandescent F = Fluorescent CFL = Compact Fluorescent Lamp

Glossary

Visit the Knowledge Hub for more technology information:
cpelectronics.co.uk/knowledge-hub



2-wire switch

These products don't require a neutral connection.

3-wire switch

These products require a neutral connection.

Absence detection

Requires a user to manually switch lights on. Occupancy sensors switch lights off when the room is empty.

BMS (building management system)

A system that controls and monitors building's mechanical and electrical equipment

Catalogue Icon Key

Suitable for the control of:



Lighting



Heating



Ventilation

HVAC

Heating, Ventilation & Air Conditioning.

Lux level sensing

Lux level sensing detectors only turn lights on when natural light falls below a pre-set level.

Neon (permanent)

A permanent neon allows a switch to be easily located in the dark.

Neon (temporary)

A temporary neon indicator shows when the timer is running.

PIR presence detectors

PIR presence detectors work by detecting the movement of body heat.

Slave switch

Slave push button switches allow one timer to be controlled from a number of locations. Also known as a bell switch.

SELV module (safety extra low voltage)

Removes the need for mains voltage switch wires and RCD to comply with IEE 17th Edition regulations.

Timeout

The period of time set on a sensor that holds lights on after the last movement is detected.

User remote control (GEFL-HS)

Pre-program light levels to recall at anytime or use simply to operate lights on/off.

Volt free contacts

The output channel comprises a mains voltage relay capable of on/off switching. The unit provides an isolated voltage free contact output.



IP Ratings

IP55

Protected from limited dust ingress. Protected from low pressure water jets from any direction.

IP40

Protected from tools and small wires greater than 1mm. Not protected from liquids.

IP65

Protected from total dust ingress. Protected from low pressure water jets from any direction.

IP54


Protected from limited dust ingress. Protected from water spray from any direction.

IP66

Protected from total dust ingress. Protected from high pressure water jets from any direction.

Technology Guide


Visit the Knowledge Hub for more technology information:
cpelectronics.co.uk/knowledge-hub

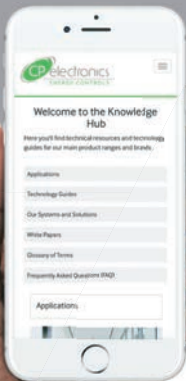

Presence and absence detection explained


Presence detectors (also known as occupancy sensors and movement/motion sensors) can be set for presence or absence detection (subject to model), depending on room usage and / or specific regulations.

Presence mode



Devices sense occupancy automatically so switch on light when a room is occupied, and off when the room is empty.

Absence mode




Requires a user to manually switch lights on. Occupancy sensors switch lights off when the room is empty.

Lux level sensing explained

Sensors with lux level functionality can save even more energy. They react to daylight, ensuring that lights stay off if there is sufficient natural light. They'll only turn lights on when natural light falls below a pre-set level.


Sensors without lux level functionality are ideally suited to switch lighting in rooms without any natural light.

No lux sensing

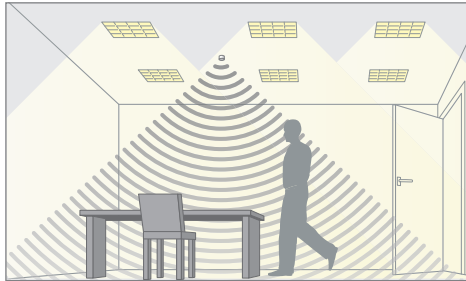

Presence detected, sensors automatically switch lights on. No presence detected, lights off.


Lux sensing

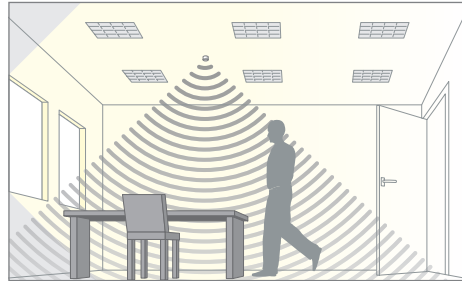

Presence detected, but lights only switch on when daylight falls below a minimum level.

Walk towards & walk across explained (PIR Detectors)

Walking towards

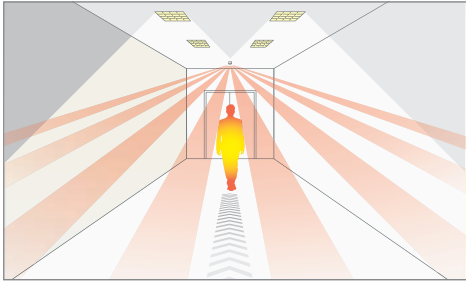

Walking towards the sensing area of a PIR detector may result in later detection as it is possible to walk towards the PIR sectors without crossing them (which is required for detection).

Walking across



Walking across the detection area of a PIR detector results in a rapid detection because multiple sectors are crossed quickly triggering the detector.

Our family of energy saving controls and services



CP Electronics
a business unit of Legrand Electric Limited
Brent Crescent, London NW10 7XR

T: +44 (0)333 900 0671
F: +44 (0)333 900 0674
www.green-i.co.uk



A brand of **legrand®**

Designs and specifications are subject to change without notice.