

# VITP7-MINPIR | Miniature ceiling mounted PIR presence/absence detector



This product is compatible with the VITP7 Vitesse Plus family of controllers such as the VITP7-MB-DD plug and socket version or VITP7-HW hardwired controllers.

The connection to the controllers is made via an easy EBS-PC RJ45 plug and socket cable arrangement.


The unit takes low power from the controllers and are SELV environment safe.

The majority of the logic of control is setup within the simple setup of the Vitesse Plus controllers but minimal configurations of time-outs and target light levels can be programmed using infra-red signals via the UNLCDHS LCD handset.


### Key Product Features:

- Small and unobtrusive design
- Supplied with 300mm lead and RJ45 coupler
- Multiple mounting options included
- Infrared programmable

### Dimensions (mm)

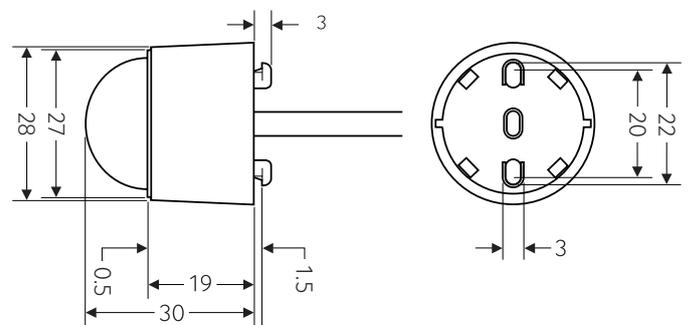

### Detection pattern

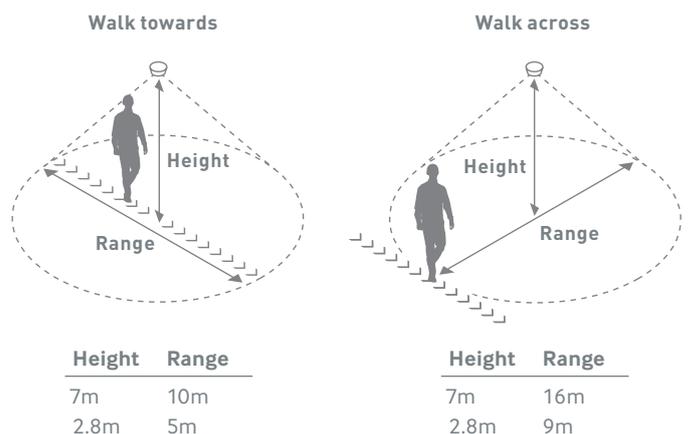


## Technical Data

Part Code	VITP7-MINPIR
Supply voltage DC	12 VDC
Working temperature range °C	-10 to 35°C
Humidity	5 to 95% non-condensing
Material (casing)	Flame retardant ABS
Compliance	CE EMC-2014/30/EU

## Accessories and Associated Products

Part Number	Description
 UNLCDHS	Professional, programming/commissioning LCD handset
 EBMHS-FRW	Miniature PIR head flush ring - white

## Installation

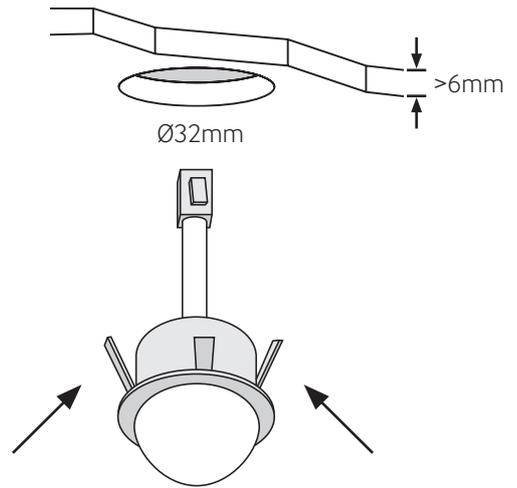

 <p>www.cpelectronics.co.uk</p>	<p>CP Electronics A Business unit of Legrand Electric Limited, Brent Crescent, London NW10 7XR, UK t. +44 (0)333 900 0671 info@cpelectronics.co.uk</p> <p>connect with us    </p>	<p><b>Important notice:</b> This device should be installed by a qualified electrician in accordance with the latest edition of the IEE Wiring Regulations and the applicable Building Regulations.</p> <p>Due to our policy of continual product improvement CP Electronics reserves the right to alter the specification of this product without prior notice.</p> <div style="text-align: right;">   </div>
--	---	--