





### **Product Guide**



## **DM-SL-PSU**

# **16VDC Power Supply**





The DM-SL-PSU is an SELV 16VDC power supply primarily designed for DALI. The unit has an integral LED that is visible through the front window to indicate that the output voltage is healthy.


This unit can be used with the following systems and products


- **D-Mate**<sup>®</sup> lighting control system.
- An-10<sup>®</sup> AT-BB-IN wireless (RF) switch input unit where latching switches are used.
- DALI lighting control systems.


#### Installation


Mount and wire the unit in the following method.

- Remove terminal covers by unscrewing the clamp screws and inserting a small flat-bladed screwdriver into the slots shown in the diagram below.
- Affix the DM-SL-PSU using the fixing slots shown in the diagram below. The fixing slots are suitable for M4 screws.
- Wire unit using the screw terminals. The screw terminals are suitable for solid core or stranded cable up to 2.5mm<sup>2</sup>. Maximum cable OD 10mm.
- Ensure that the main cable sheathing is over the cable clamp area.
- Clip on the terminal covers.
- Insert the clamp screws and screw up until the cable is firmly clamped.





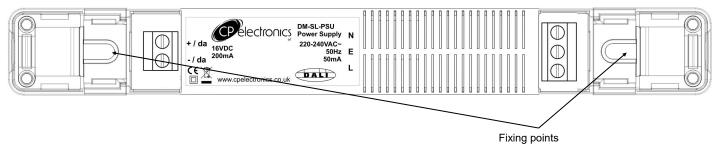

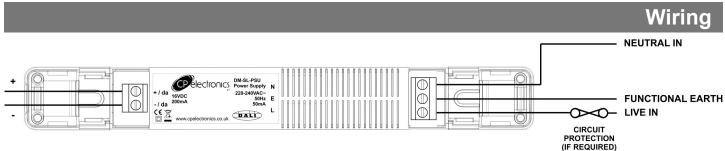

### **Technical data**

Dimensions See diagrams opposite

Weight 0.07kg
Input Voltage 220-240VAC
Input Current 50mA
Input Frequency 50Hz

Output Voltage 16VDC +/- 2V SELV 200mA (maximum)

Terminal Capacity 2.5mm<sup>2</sup>

Solid and stranded. Maximum

cable OD 10mm.

Safety Note DALI is not SELV. If this product

is used in a DALI system then mains rated wiring must be

used for the output.


Temperature 0°C to 35°C

Humidity 5 to 95% non-condensing Material (casing) Flame retardant polycarbonate

Compliance EMC-2014/30/EU LVD-2014/35/EU

For further compliance information visit www.cpelectronics.co.uk/compliance



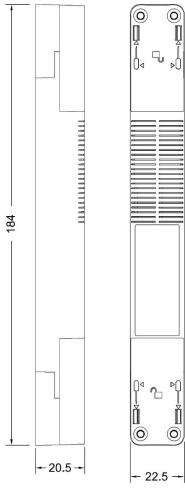



### Part numbers

Part number Description

Detector EBDSPIR-DM D-Mate PIR detector

Addressers DM-SL-ADD D-Mate addresser-DIL-DALI/DSI

DM-SL-ADDR D-Mate addresser-DIL-DALI/DSI-relay

DM-SL-ADAR D-Mate addresser-DIL-1-10V-relay

Power supply DM-SL-PSU D-Mate PSU

Scene plate DM-SC-PSU D-Mate PSU D-Mate PSU D-Mate plate D-Mate plate D-Mate input unit An-10 AT-BB-IN An-10 RF input unit

#### **IMPORTANT NOTICE!**

This device should be installed by a qualified electrician in accordance with the latest edition of the IEE Wiring Regulations and any applicable Building Regulations.







C.P. Electronics Ltd Brent Crescent London NW10 7XR United Kingdom

Tel: + 44 (0) 333 900 0671 Fax: + 44 (0) 333 900 0674 www.cpelectronics.co.uk enguiry@cpelectronics.co.uk